

SAAV EXTEND

Measurand's unique technology, developed over 25 years, makes ShapeArray the only patented geotechnical monitoring instrument of its kind.

ShapeArray gives you a more complete picture of subsurface movement with unparalleled resistance to deformation.

This automated, inclinometer-style instrument has set a new standard for ease of installation and data collection.

PATENTED PRODUCTS. DATA YOU TRUST.




 MEASURAND

SAAV EXTEND

Measurand's latest innovation—SAAV Extend—addresses the challenges of continual deformation monitoring during the raising of tailings dams.

Inspired by direct feedback from clients in the tailings and mine waste sectors, SAAV Extend provides a continual deformation profile throughout multiple dam raises with unparalleled ease of installation and data interpretation.

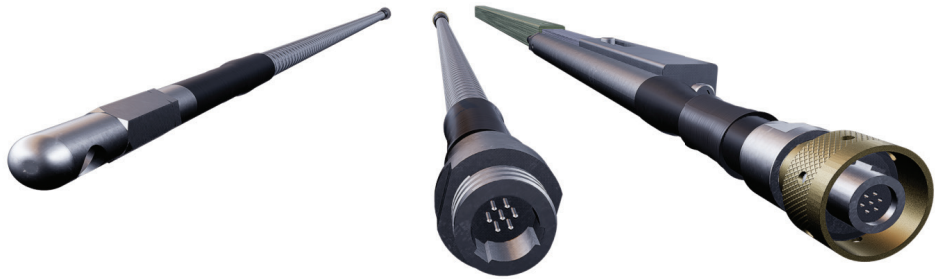

CONNECTABLE. SAAV EXTEND.



INITIAL INSTALLATION

DAM RAISE

COMPLETED DAM LIFT

MONITOR DAM LIFT OPERATIONS

SAAV Extend is a modular ShapeArray system that scales along with your project's scope.


SAAV Extend includes a top assembly that connects to a base assembly that creates a continuous deformation profile of a borehole.

When it is time to raise the tailings dam, SAAV Extend Lift Extension segments can be added between the top and base assemblies to increase the total sensorized length.

SAAV Extend's connectors are keyed to ensure azimuth is maintained as Lift Extension segments are added in the field.

SAAV EXTEND

Connect sensorized segments in the field for a continuous deformation profile.

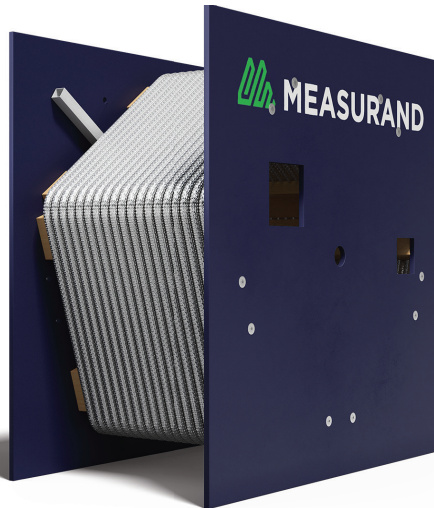

Segment Length:
500 mm

Installation:
Vertical

Applications:
Permanent/Temporary

PHYSICAL PROPERTIES

SEGMENT LENGTH	500 mm (Joint centre to joint centre)
CONDUIT & CASING OUTSIDE DIAMETERS	70 mm to 85 mm inclinometer casing
SAAV EXTEND OUTSIDE DIAMETER	49 mm, fits in 52 mm inside diameter schedule 40 PVC pipe (2" trade size)
MIN. LENGTH OF SAAV EXTEND LIFT EXTENSION SEGMENT	1 m
MAX. COMBINED LENGTH OF SAAV EXTEND	Up to 200 m (500 mm segments)
TENSILE STRENGTH	113 kgf (SAAV joint weakest point) 320 kgf (Connector)
WATERPROOF TO	2000 kPa (200 m Water)
CONNECTOR RATINGS FOR WATER PRESSURE	700 m H2O (1000 psi) mated 140 m H2O (200 psi) open face
POWER REQUIREMENTS	12 VDC (12–16.5) at 1.8 mA/segment 12 VDC (12–16.5) at 0.4 mA/segment (low power mode)
ACCURACY OF DEFORMATION RELATIVE TO STARTING SHAPE¹²³	± 1.5 mm for 32 m ShapeArray
RESOLUTION OF SINGLE SEGMENT³⁴	± 1 arcsecond

¹ One-sigma value, based on cyclical installation in 59 mm ID casing. Accuracy degrades as square root of length.

² Value based on Average in Array (AIA) setting of 1000 samples.

³ Specification is for 3D mode within ± 20° of vertical. Vertical accuracy degrades with angular deviation from the vertical.

⁴ RMS calculated from published noise figure of sensor (verified by Measurand) and bandwidth of system using highest AIA setting of 25,600 samples.



KEY TAKEAWAYS

ShapeArray that grows with your monitoring strategy

SAAV Extend will always have a sensorized length that is right for your needs. Individual sensor segments are 500 mm each and can be combined up to a total sensorized length of 200 m.

Simple installation in the field

SAAV Extend's hand-tight threaded connectors allow clients to easily add sections of lift extension segments without additional tools. Adding new lift extension segments is as simple as twisting, while keyed alignment marks on the connectors maintain the ShapeArray's azimuth.

Total control to monitor the zone of interest

Clients can use silent segments first introduced with SAAV, in addition to SAAV Extend's lift extension segments to target the total sensorized length towards the geologic zone of interest.

A connectable ShapeArray design that is just as durable as SAAV

Designed specifically for the rigors of tailings dam safety monitoring, SAAV Extend is submersible up to a depth of 200 m. SAAV Extend has the same 38-year MTTF as any ShapeArray that Measurand manufactures. It also has the same temperature tolerances and tensile strength, so clients can trust SAAV Extend in as wide a range of environments as existing SAAV models.

Real-time measurements in real-world conditions

You cannot guarantee pristine conditions in the field when you need to perform your ShapeArray installation. That's why SAAV Extend's connectors have a 300-psi open-face pressure rating. You can connect segments in the rain without worrying about damaging your instruments.



ANATOMY OF SAAV EXTEND



TOP ASSEMBLY

The top assembly is the brain of the SAAV Extend that locks the instrument into standard inclinometer casing with Measurand's patented cyclical installation method.

ANATOMY OF SAAV EXTEND



LIFT EXTENSION SEGMENTS

Lift extension segments added between the top assembly and base array connect to form the SAAV Extend's total sensorized length.

ANATOMY OF SAAV EXTEND



BASE ARRAY

The base array refers to the sensorized segments at the bottom of the borehole after the initial installation.



PATENTED PRODUCTS.
DATA YOU TRUST.

TELL US ABOUT YOUR PROJECT

Measurand designs and manufactures superior monitoring products. All ShapeArray instruments are manufactured in Measurand's high-capacity ISO 9001:2015 certified facility.

Measurand's staff of experts is ready to help, from sales to installation to support.

Sales Support

sales@measurand.com

Technical Support

support@measurand.com

Measurand

2111 Route 640
Hanwell, NB
E3C 1M7
Canada

Tel: 1 (506) 462-9119

Connect with us



Visit us online at www.measurand.com



www.measurand.com